

## INSTALLATION INSTRUCTIONS

### LGSLTE SLATWALL BRACKET


#### CARTON CONTENTS

QUANTITY	DESCRIPTION
4	SLATWALL BRACKET

TOOLS REQUIRED - PHILLIPS SCREW DRIVER AND / OR PLIERS

The LGSLTE Slatwall Bracket is versatile and can be used to mount a wide range of objects to slatwall. The objective is always to be able to easily remove the object for use or relocate / reorganize you system to fit your needs.

Consideration # 1: The LGSLTE, Slatwall Bracket always has to be installed at or below the top edge of the bracket as shown below.

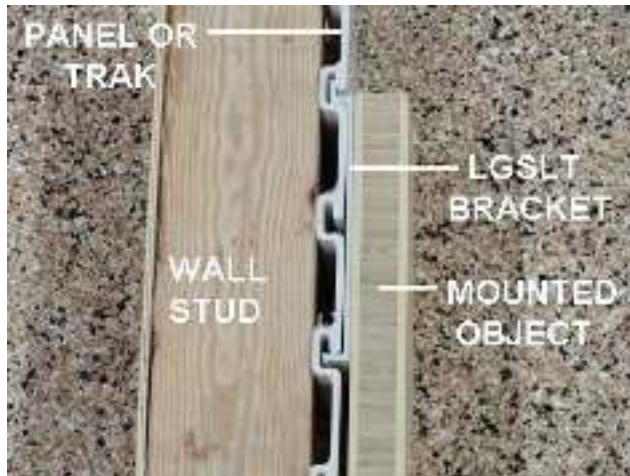

**CORRECT**



**INCORRECT**

Consideration # 2: The heavier the load, the more appropriate it is to fasten the object in the holes near the top of the bracket.

Consideration # 3: Any type fastener can be used - wood screw, nut/ bolt, toggle bolt, drywall screw, pop rivet, etc. If the existing hole(s) aren't large enough on the bracket, drill the out to the size needed. (or drill ones in a new location). Fasteners are not supplied with the brackets.