



**INSTALLATION INSTRUCTIONS**


**GT1315 – FOLDING TABLE BRACKETS**

**CARTON CONTENTS**

ITEM	QUANTITY	DESCRIPTION
A	1	TOP BRACKET - 48" WIDE
B	1	BOTTOM BRACKET -
C	2	FOLDING ARM ASSEMBLIES
-	8	NUTS, WASHERS, YELLOW CAPS

**IMPORTANT NOTE: THE GT1315 PRODUCT CONSISTS OF THE METAL BRACKET SETUP ONLY. A TABLE TOP IS NOT SUPPLIED WITH THE PURCHASE AND IS THE CUSTOMER'S RESPONSIBILITY TO SUPPLY A TABLE TOP OF HIS / HER CHOICE. A TABLE TOP IS SHOWN IN THE ABOVE AND FOLLOWING IMAGES AS A SUGGESTION OF WHAT CAN BE DONE AND CLARIFY THE ASSEMBLY STEPS. THE TOP USED CAN BE 24"-30" DEEP AND 48" TO 60" WIDE.**

**TOOLS REQUIRED - PHILLIPS SCREW DRIVER / PLIERS  
OPTIONAL FOR EASIER ASSEMBLY: ELECTRIC DRIVER, PHILLIPS DRIVER BIT,  
SOCKET WRENCH SET.**

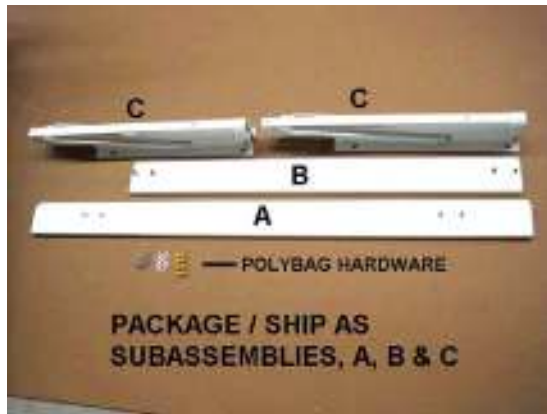

STEP 1



STEP 2

STEP #1: CHECK PARTS RECEIVED.

STEP #2: PLACE TOP BRACKET (A) THE DESIRED DISTANCE FROM THE FLOOR. MOUNT THE 2 FOLDING ARM ASSEMBLIES (C) ON THE TOP BRACKET AS SHOWN.



STEP 3



STEP 4

STEP #3: MOUNT BOTTOM BRACKET (B) AND FASTEN WITH THE SUPPLIED NUTS, WASHERS & YELLOW CAPS

STEP #4: PLACE THE TABLE TOP BACK EDGE IN LINE WITH FOLDING BRACKET ASSEMBLY AS SHOWN (THIS IS IMPORTANT SO THE TABLE TOP CAN BE "LIFTED" TO DEPRESS THE LOCKING ARMS.)



STEP 5



COMPLETE

STEP #5: WITH 1" SELF DRILLING SCREWS OR 1" TEK PANEL SCREWS, FASTEN THROUGH ANY 2 HOLES IN EACH BRACKET ASSEMBLY.

**FOLDING TABLE OPERATION**

THE TABLE TOP CAN NOT FOLD OR COLLAPSE ACCIDENTALLY.

1. EACH ARM HAS A LEVER WHICH LOCKS THE TOP INDEPENDENTLY.
2. BOTH LEVERS HAVE TO BE DEPRESSED AT THE SAME TIME TO UNLOCK THE TOP.
3. THE TABLE TOP HAS TO BE RAISED BEFORE EITHER ARM CAN BE UNLOCKED.

